



The LR125 and Winnebago Control app accept two types of connections: near-field and far-field. A near-field connection is simple and requires only that the device running the Winnebago Connect app be connected to the RV's local WiFi network. Once connected to WiFi, a user can open the app and press "Connect to Coach".

A far-field connection is one in which the user is accessing their LR125 from a network other than the RV's local WiFi. Specifically, if the user's phone or tablet is connected to a different WiFi network or using a cellular data connection instead of WiFi, data to and from the LR125 will be relayed through a secure server. Far-field connections require the RV's LR125 to be registered to a user's account. Registering the LR125 simply tells the server which LR125 should be accessible to the owner of the account.

To register an LR125, the user must first go to www.roziecoreservices.com and create an account. Once the account is created, go to Advanced Settings in the app menu. This can also be done in a web browser by entering the LR125's IP address in the URL and adding /admin.

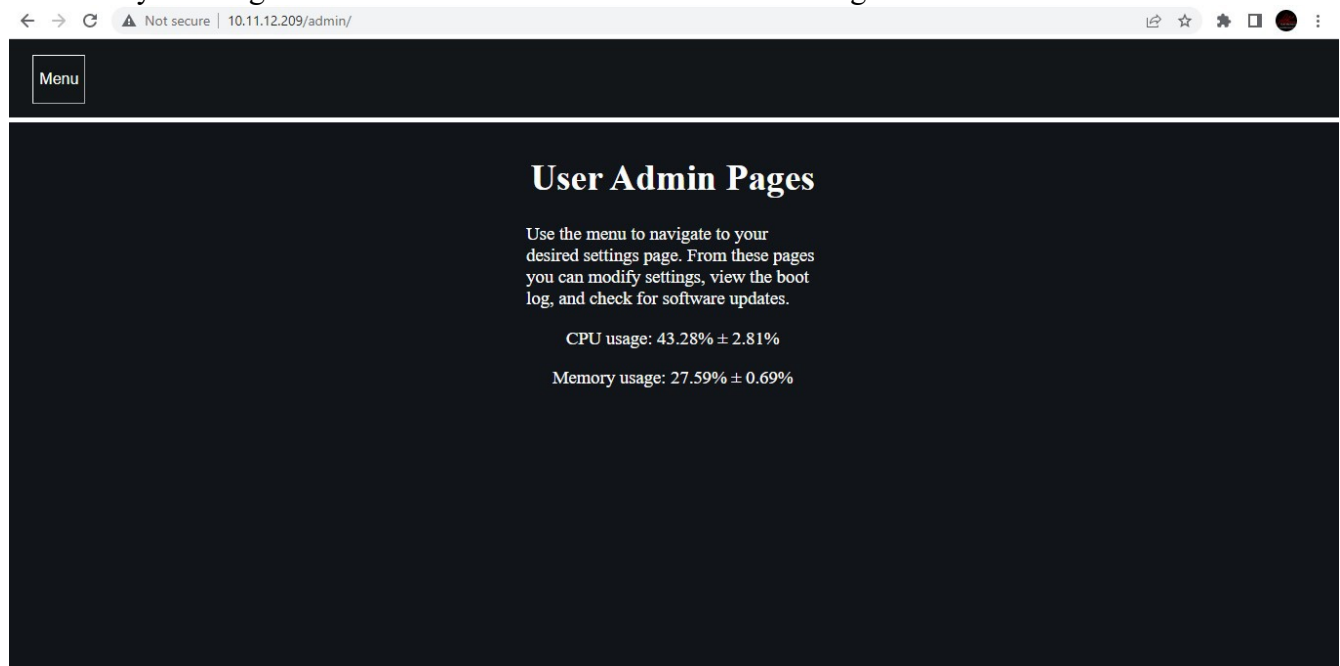

From the admin menu, select Live Cloud Configuration.

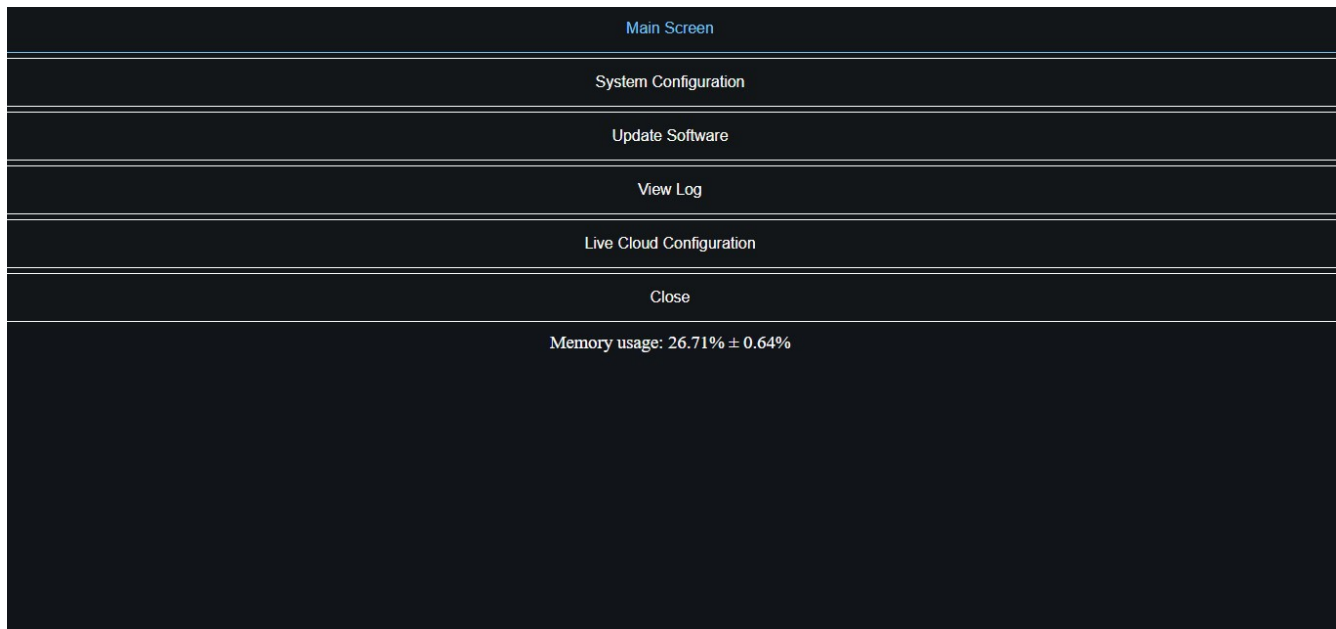

From there, click on Register My Device. This will take you to a login screen where you will need to enter the user name and password that were just created. Once logged in, you will see a long alphanumeric phrase, which is your registration token. You do not need to copy this. Just click on Return and the token will automatically be copied and pasted into a registration field. Click Submit, and you are finished. You can now connect to your LR125 through a far-field connection in your app.

When transitioning from near-field to far-field, if the app doesn't automatically switch, you can activate your far-field connection from the app menu by pressing Cloud Login. If the app is not allowing you to connect via near-field or far-field, this may be the result of a security feature called whitelisting. Whitelisting was added to the LR125 as an extra layer of protection to keep out devices that are not authorized to connect to your RV. You can access the whitelisting settings from your touch panel by going to Settings > Tablet WiFi Settings. Scroll down and press Connected Devices. Press Pair on the touch panel and connect to the app from your device. Your mac address will be added to the list of devices on that same page on the touch panel and you will now be able to connect through your app.